

DS-K1T323MBFWX-E1 **Value Series Face Access Terminal**



- 2.4-inch display screen, 2 Mega pixel wide-angle lens
- 1,000 face capacity, 3000 card capacity, and 3000 fingerprint capacity
- Face recognition duration < 0.2 s/User
- Supports face, card, and fingerprint authentication
- Two-way audio with client software, indoor station, and main station
- Supports AP mode. Supports mobile Web and PC Web for configuration
- Powers supply by standard PoE and at the same time powers supply for door lock (12 VDC/1 A)
- Supports WDR

▪ Specification

System	
Operating system	Linux
Display	
Screen size	2.4-inch
Resolution	240 × 320
Type	TFT
Operation method	Non touchable
Video	
Resolution	2MP (video stream:540P)
Lens	×1
Video standard	PAL (Default) and NTSC
Network	
Bluetooth	Support
Wired network	10/100 Mbps self adaptive
Wi-Fi	Support
Interface	
PoE	IEEE802.3at, standard PoE
Network interface	1
Wiegand	1, supports Wiegand input, single direction
Lock control	1
Exit button	1
Door contact input	1
TAMPER	1
Capacity	
User capacity	1000
Card capacity	3000
Face capacity	1000
Fingerprint capacity	3000
Event capacity	150000
Authentication	
Card type	M1 card,M1 card content,CPU card No.
Card reading frequency	13.56 MHz
Face recognition duration	< 0.33 s
Face recognition accuracy rate	> 99%
Face recognition distance	0.3 to 1.5 m
General	
Button	1 physical call button
Power supply	12 VDC, 1 A, standard PoE
Working temperature	-30 °C to 65 °C (-22 °F to 149 °F)
Working humidity	0 % to 90 % (no condensing)
Dimensions	157 mm × 52 mm × 26 mm (6.18" × 2.05" × 1.02")
Installation	Wall mounting
Protective level	IP65


Language	English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil), Turkish, French, Traditional Chinese
Weight	Net weight: 0.22 kg (0.49 lb) Rough weight: 0.61 kg (1.34 lb)
Function	
QR code recognition	Not support
Face anti-spoofing	Support
Two-way audio	Support
Audio prompt	Support
Time synchronization	Support

▪ Available Model

DS-K1T323MBFWX-E1

DS-K1T323MBFWX-E1/Brazil/ANATEL

▪ Dimension

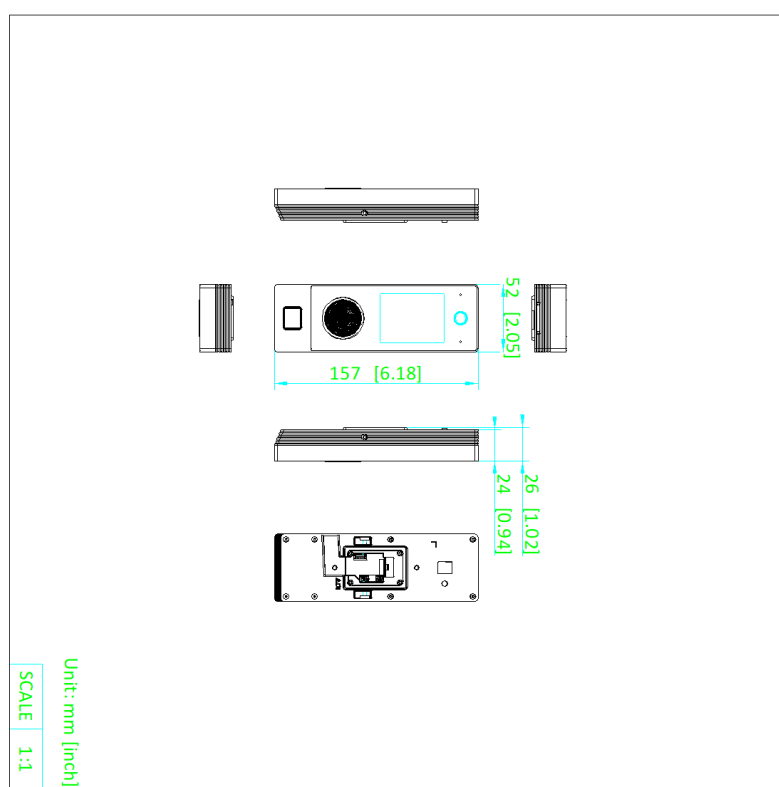

▪ Accessory

▪ Optional

DS-KAB323-B1

DS-KAB323-S1

DS-KAB323-W1



See Far, Go Further



www.hikvision.com
support@hikvision.com

